VET

Veterinary radiographic digital imaging

AMS
AUSTRALIAN MEDICAL SYSTEMS
0400 771 923 or 1800 200 677
AustralianMedicalSystems.com
Sales@AustralianMedicalSystems.com

BMI
BIOMEDICAL INTERNATIONAL

Fast digital workflow - Optional DR FPD or CR Scanner

Radiographic table with
built-in 30 kW HF generator

43x43 Gos or CsI
Flat Panel Detector

Medical CE
PC Workstation

Imaging Software

Export images

Burn CD/DVD

Print images

X-ray generator

Description	Values
Max power	30 kW (300 mA - 100 kV @ 100 msec)
Generator frequency	40 kHz
H.T. control	High frequency
Max ripple	< 2% @ maximum power
kV increasing time	< 3 msec
Exposure time	1 msec ~ 6300 msec (35 steps)
kV variation range	40 ~ 125 (step 1 kV)
mAs range 2 point technique	0.2 ~ 315 mAs (27 steps)
mA Range	25 ~ 400 mA (13 steps)

Radiographic parameters selection

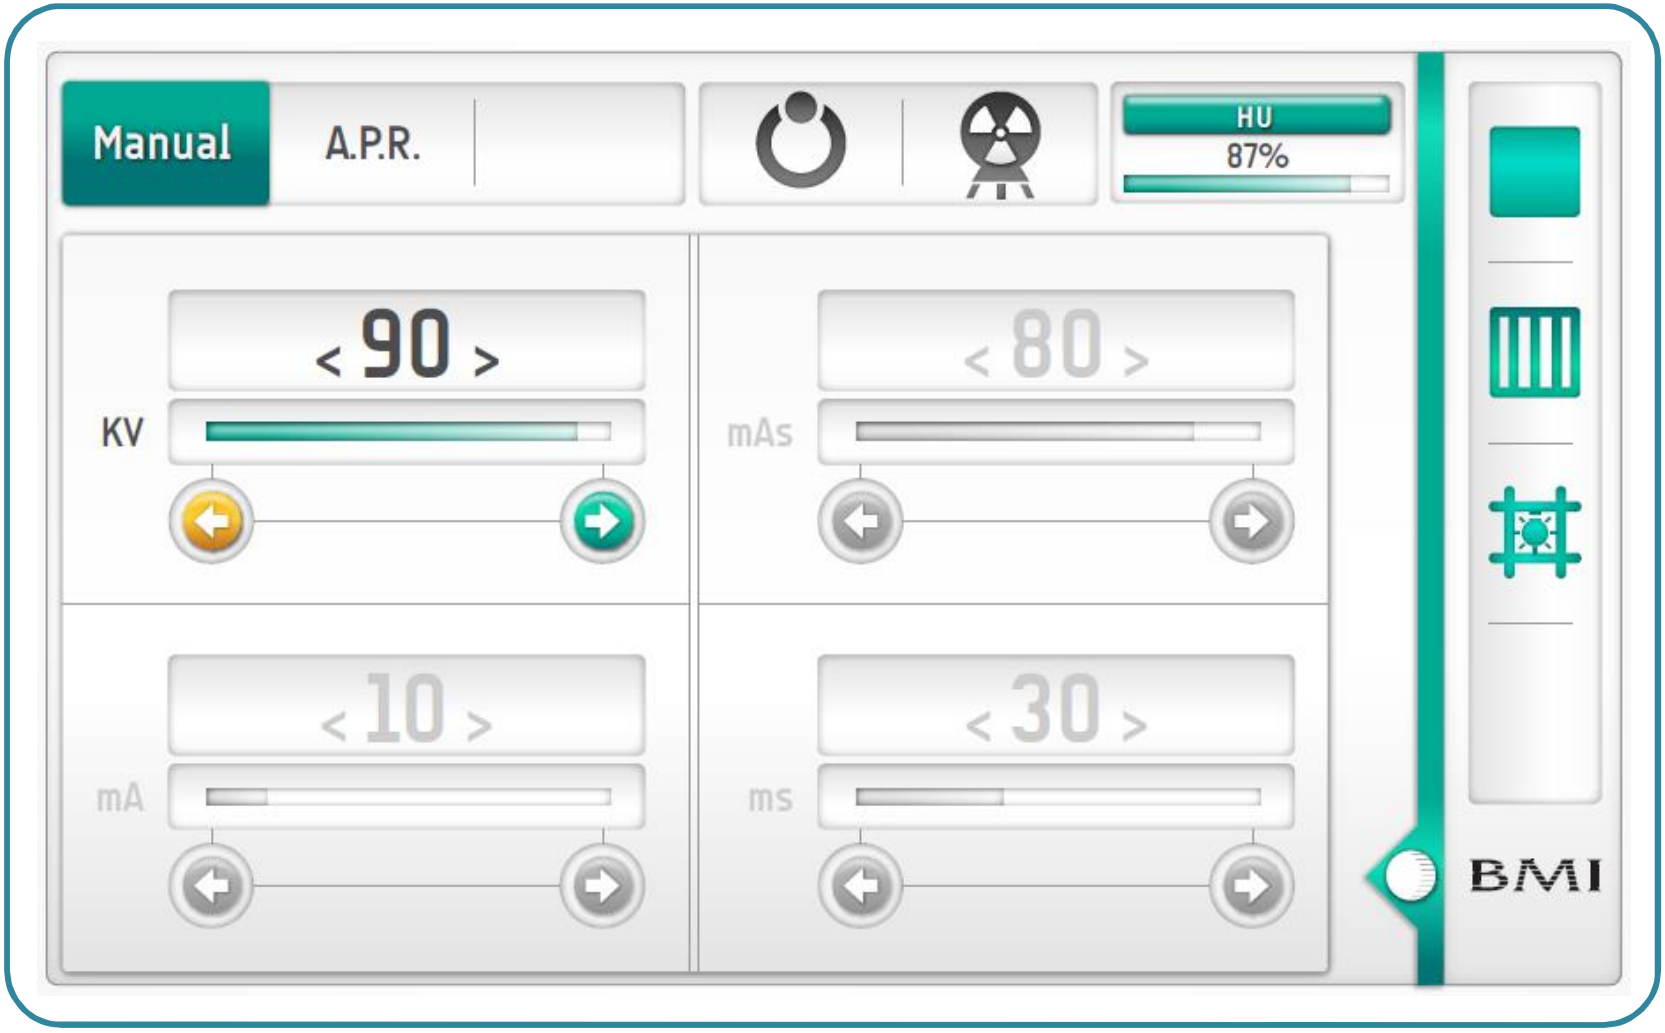

APR Selection menu

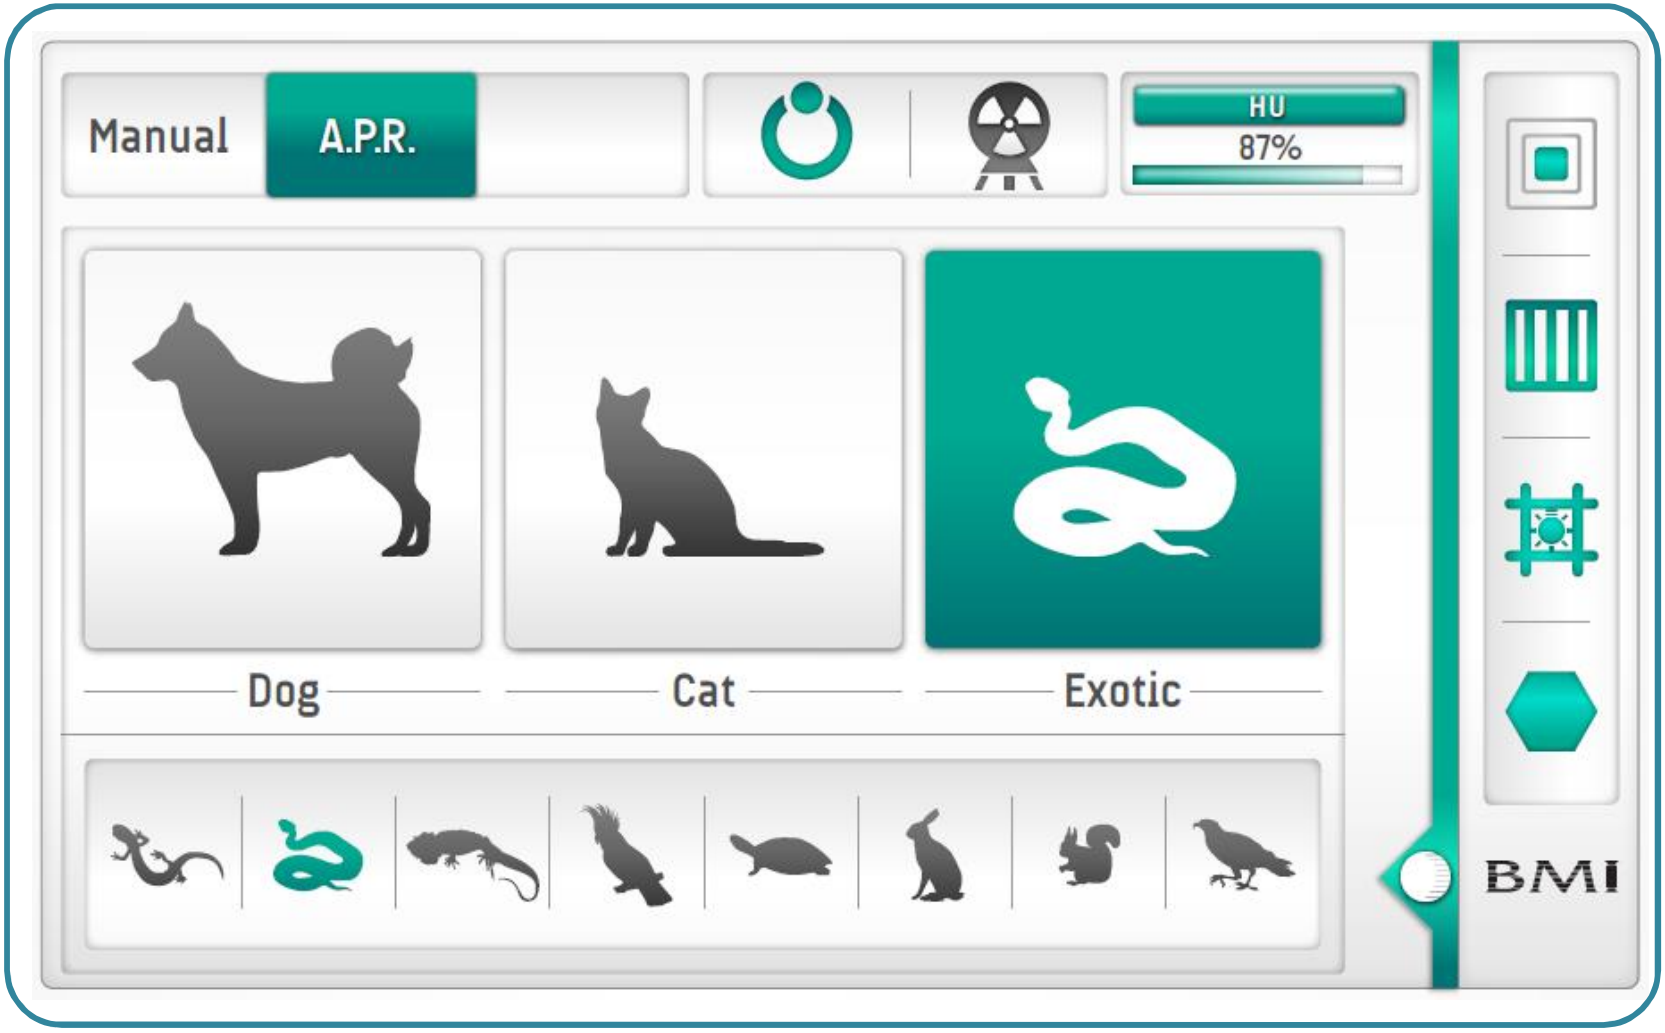

APR Selection sub-menus

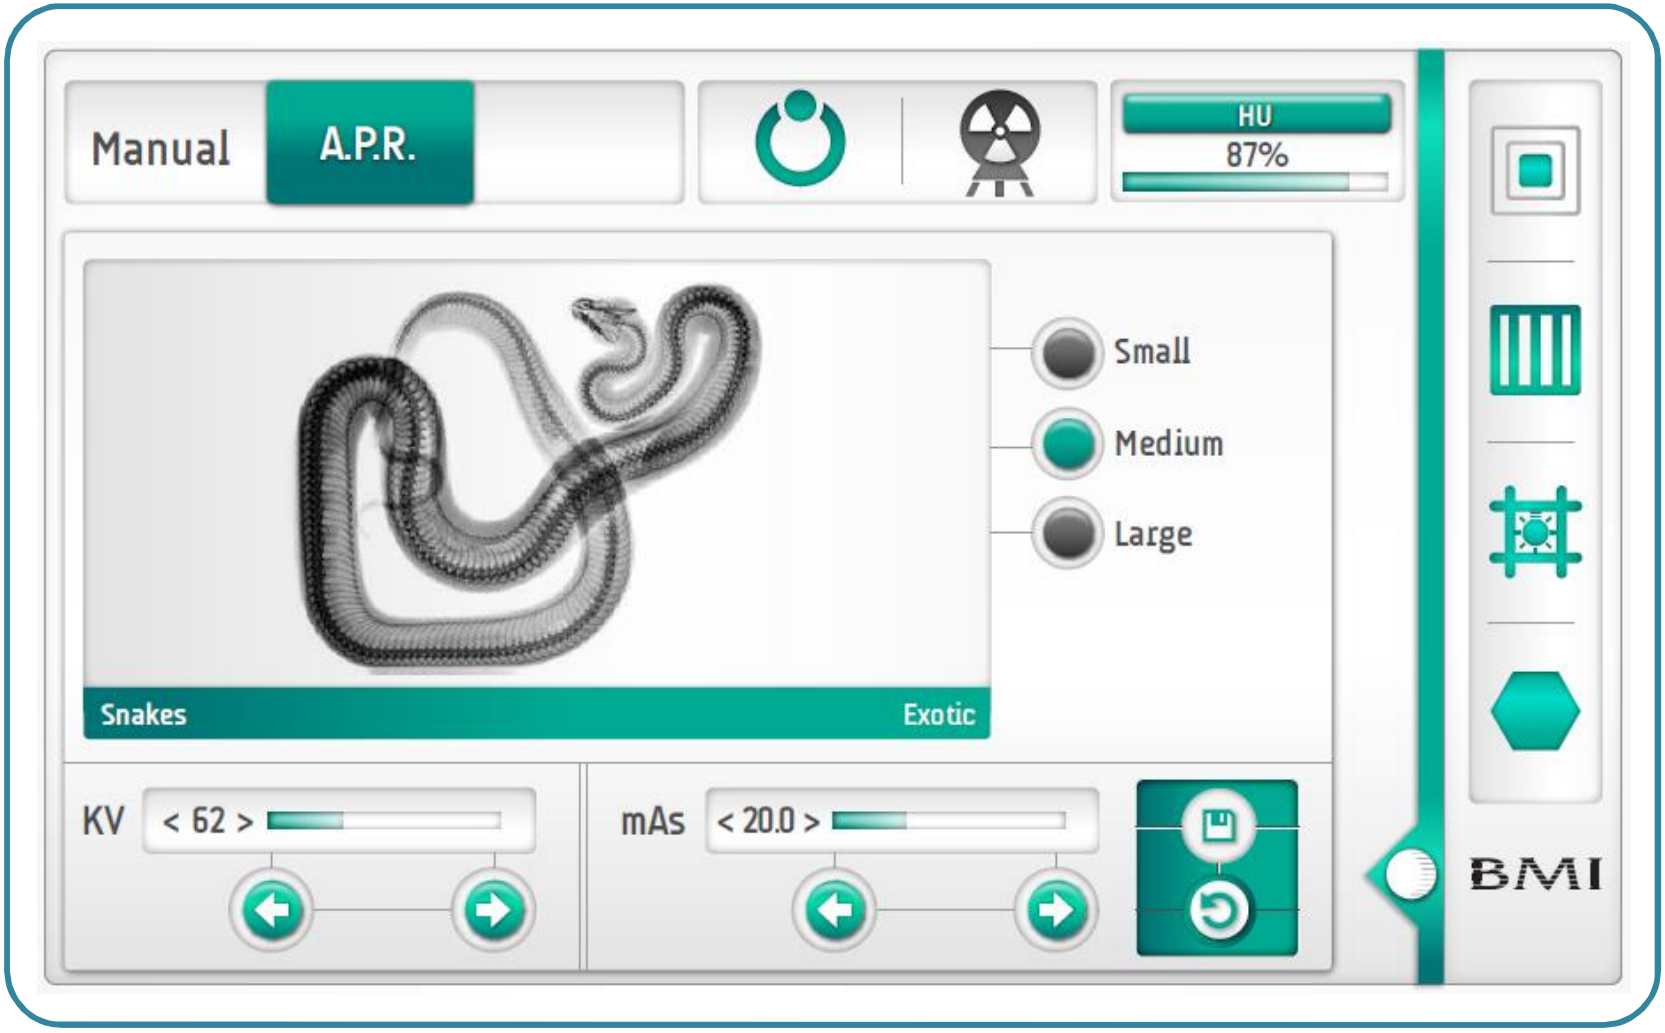

Dog APR sub-menus example

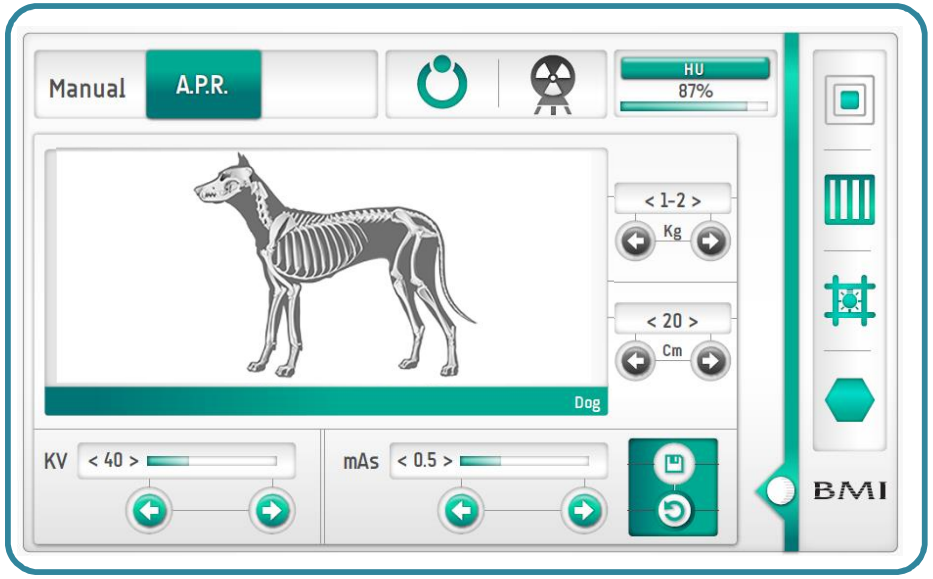

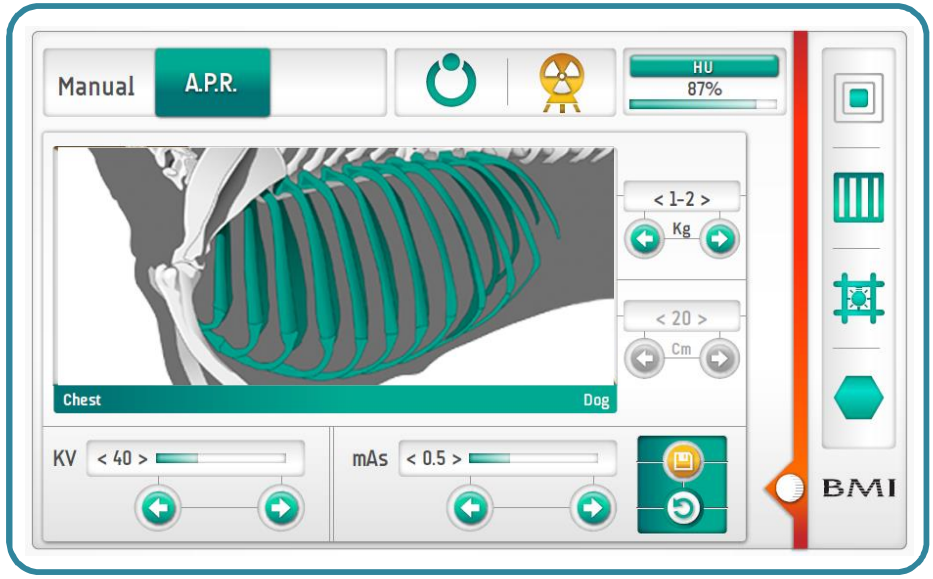

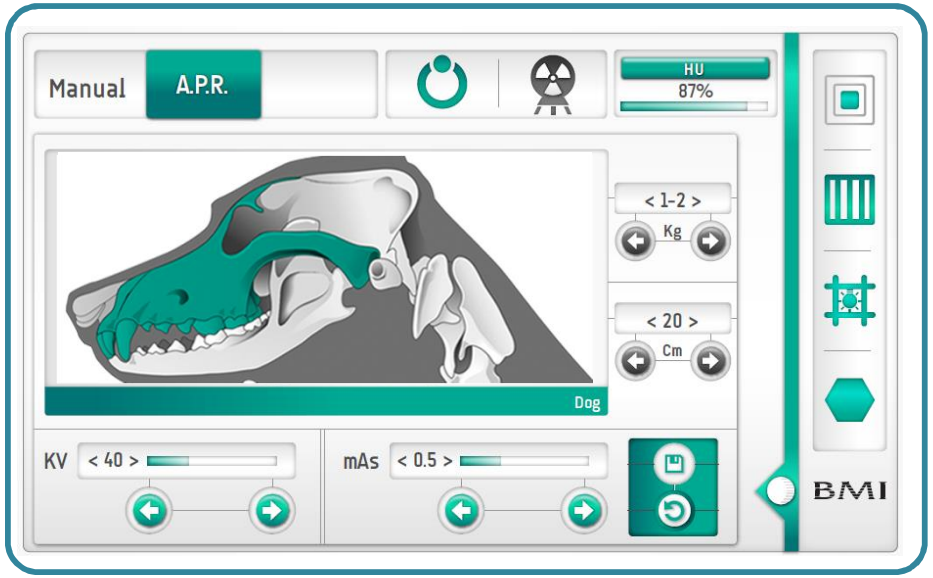

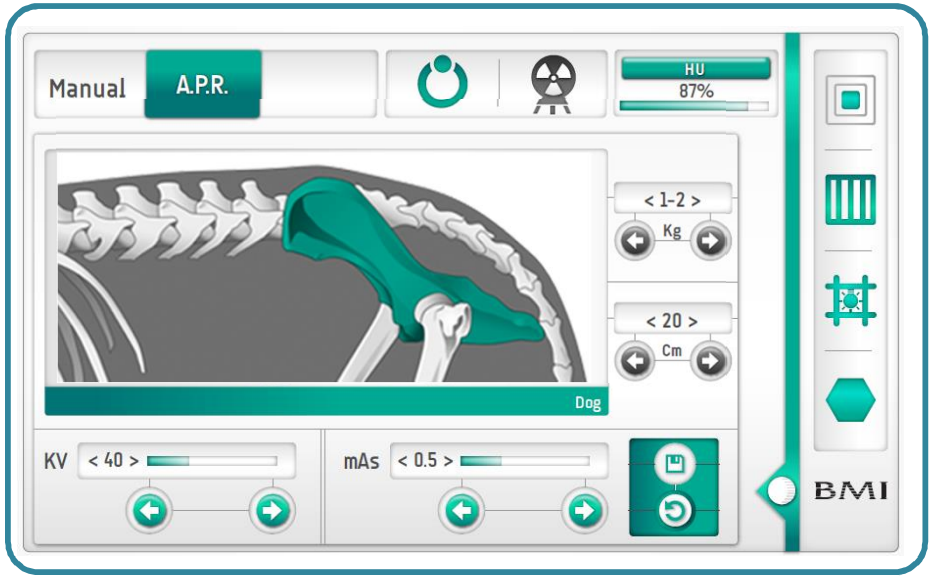
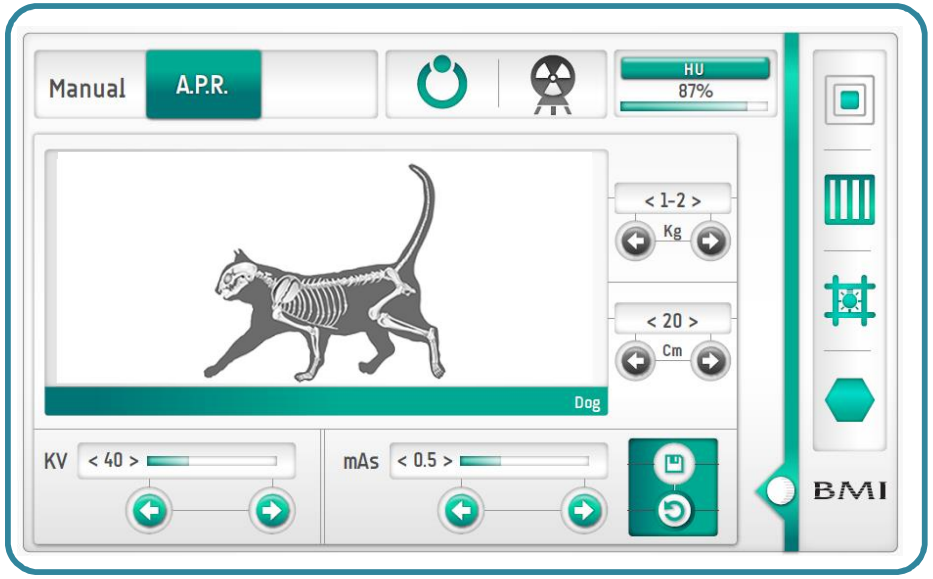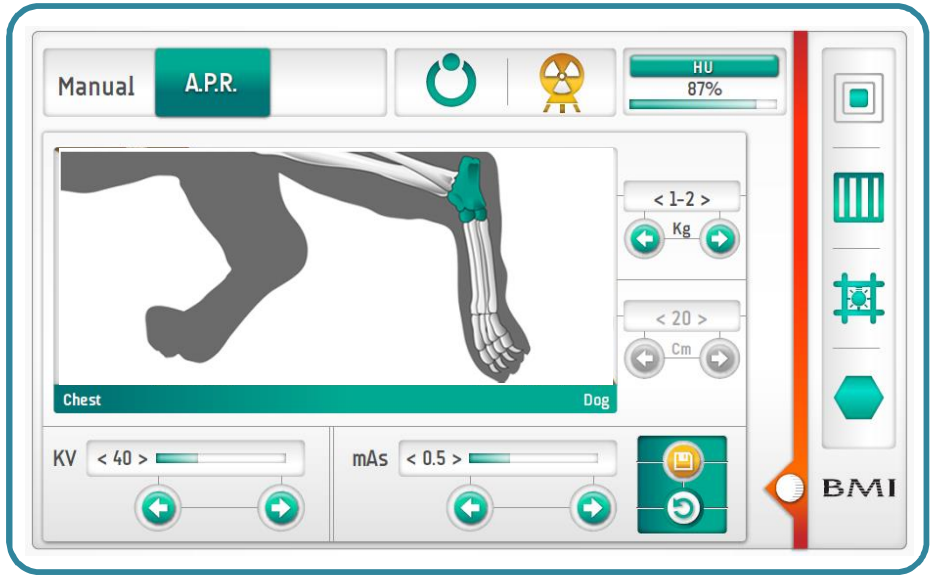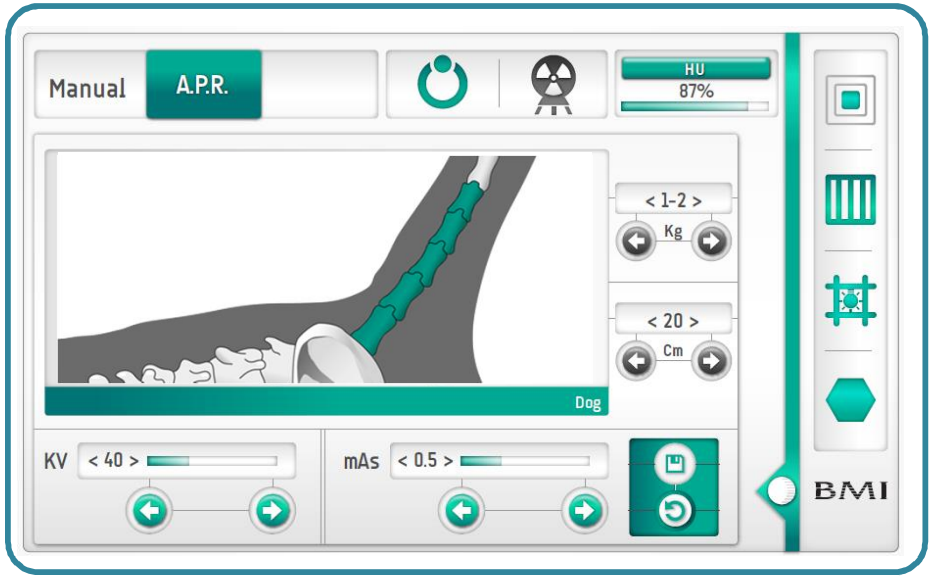
Cat APR sub-menus example